


SEQ_B13V_1_A

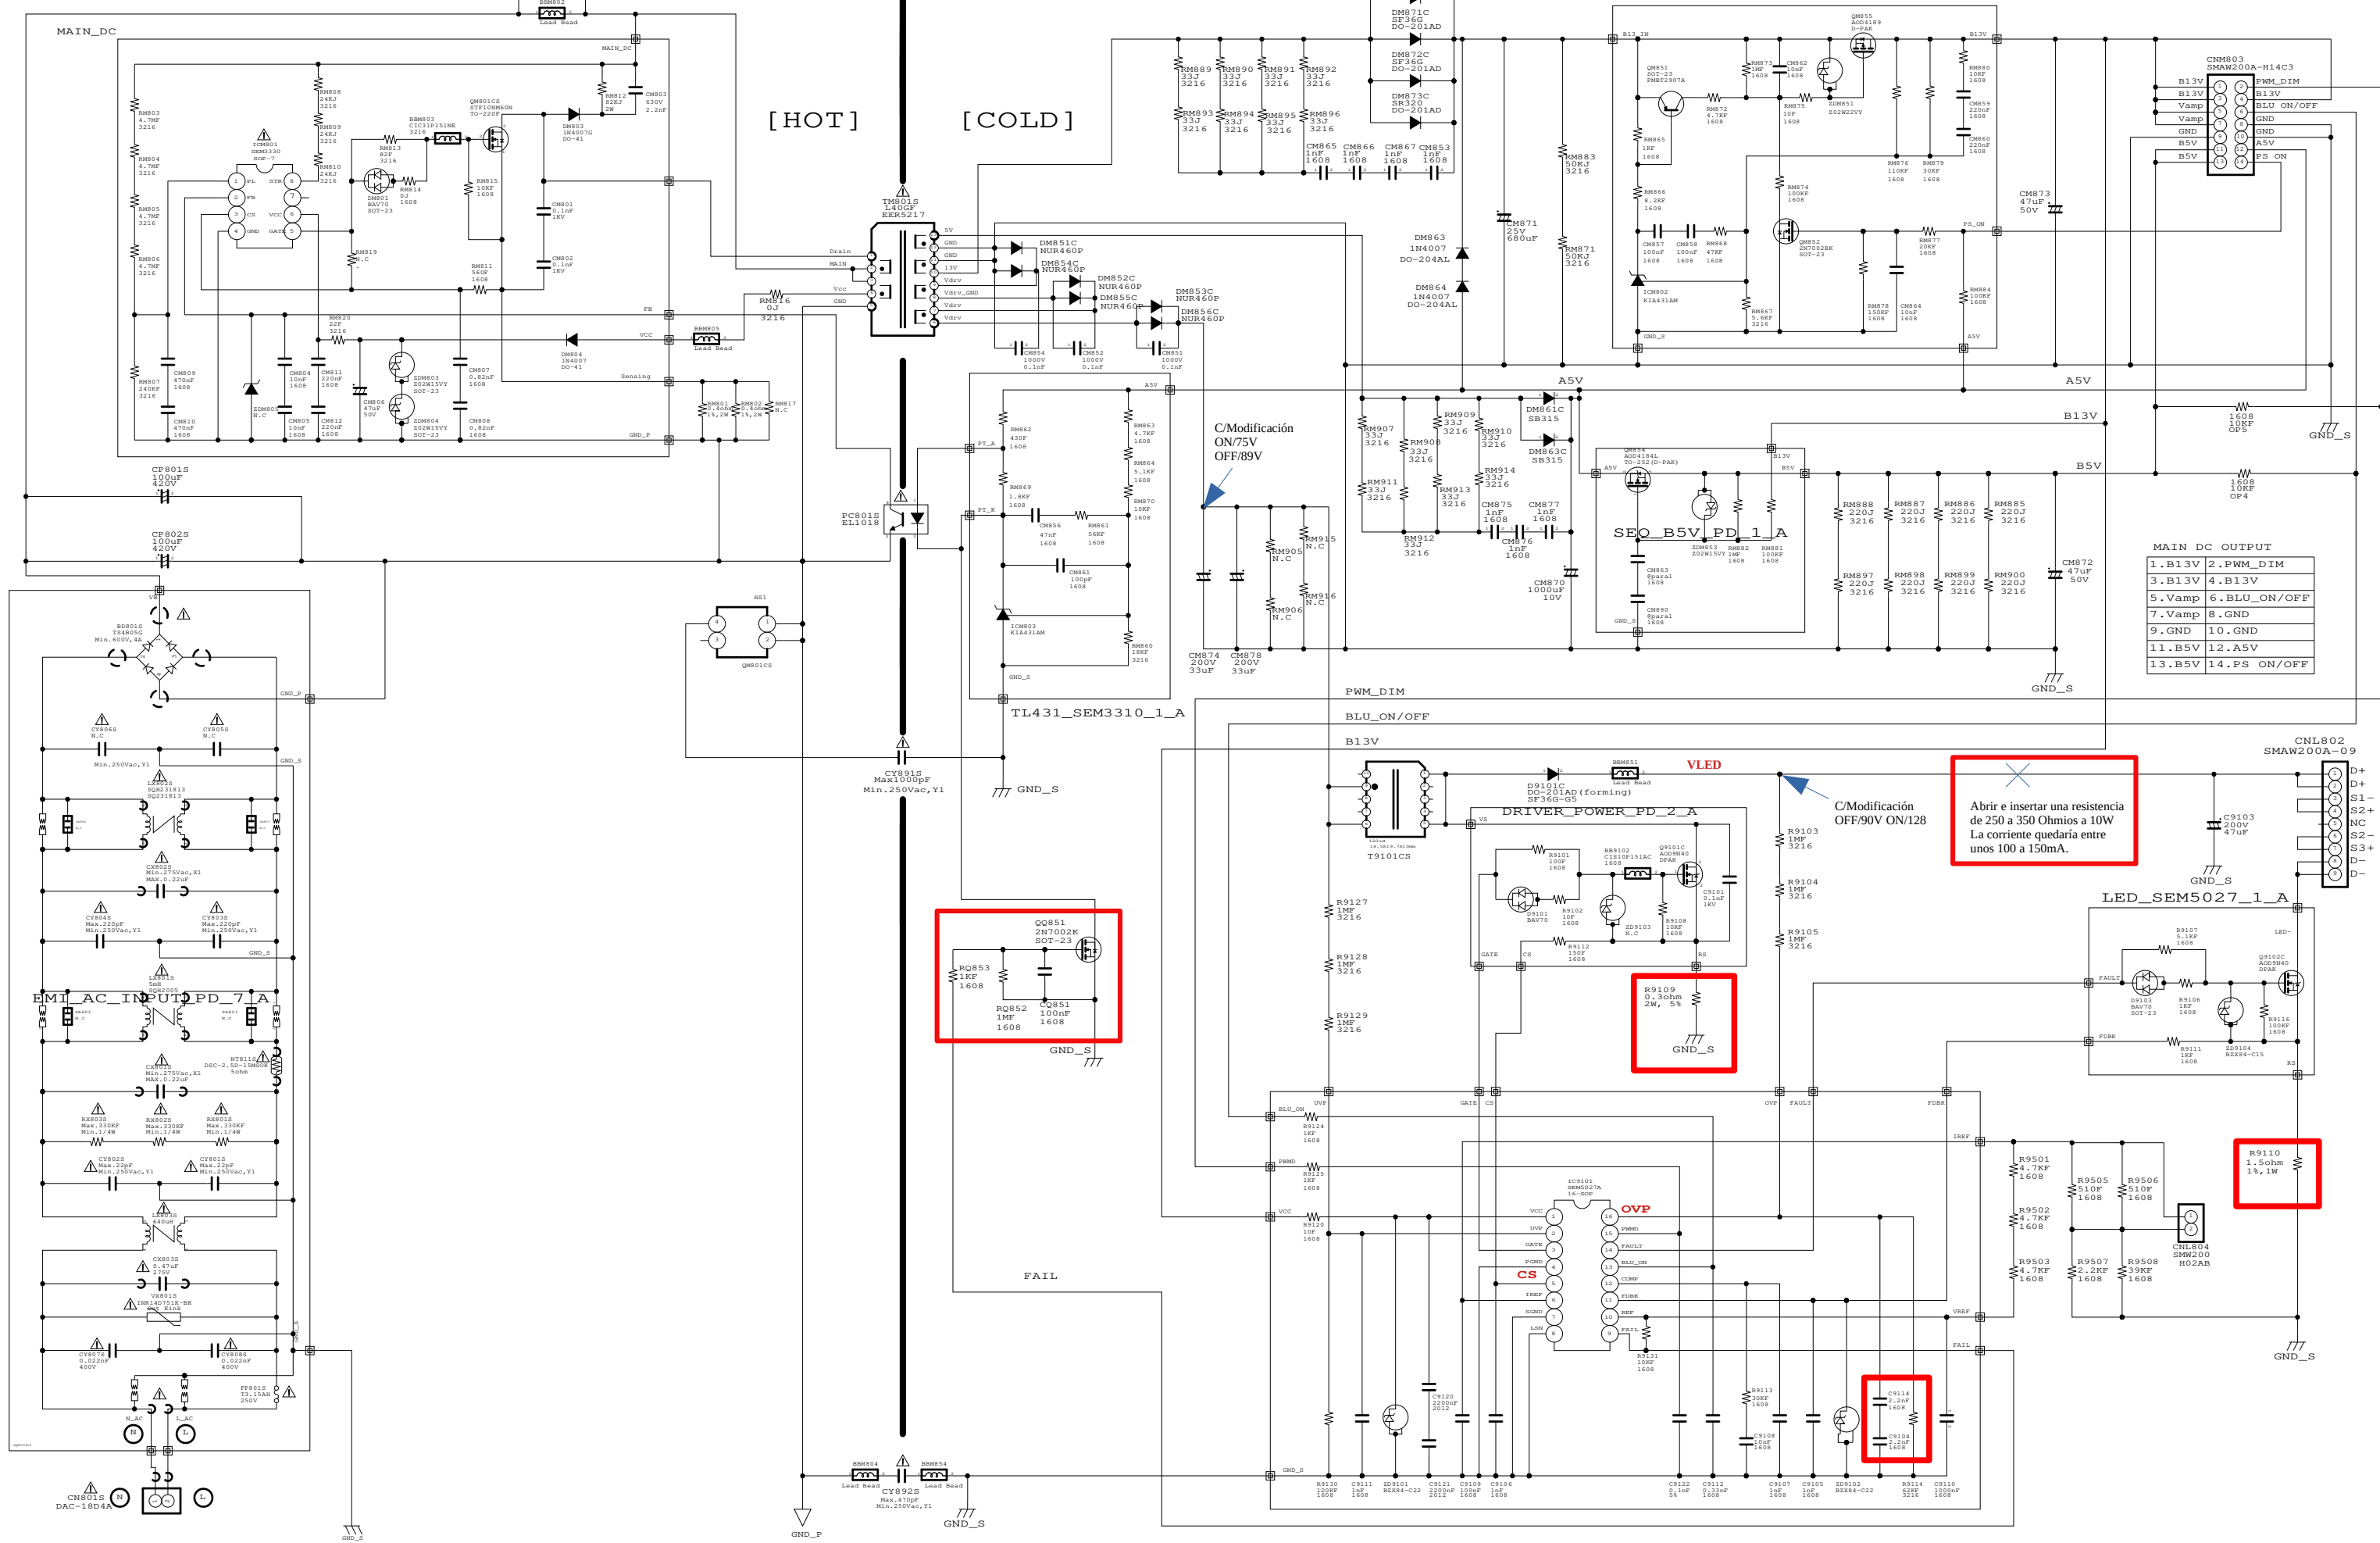

MAIN DC OUTPUT

1. B13V	2. PWM_DIM
3. B13V	4. B13V
5. Vamp	6. BLU_ON/OFF
7. Vamp	8. GND
9. GND	10. GND
11. B5V	12. A5V
13. B5V	14. PS ON/OFF

Abrir e insertar una resistencia de 250 a 350 Ohmios a 10W La corriente quedaria entre unos 100 a 150mA.

Q851 2N7002K SOT-23

R9109 0.30ohm 2W, 5%

R9110 1.5ohm 1%, 1W

C9114 2.2uF 1608

NOTE
N.C : No Connection
Comply with the threshold of substances which are specified in 0QA-2049.

TRACE-LABEL Bar-Code Label

D	I	A	TH	T	ICT	FT#1	B/1	FT#2	R/P



SAMSUNG ELECTRONICS	2013.10.28
I40GF_ESM	H.K.KANG
BN44-00666E	J.E.KIM
PSLF930G06A	S.H.KIM